

# Competitive Advantages



- Structural support **every 4' (1.22mt)**.
- Feeder troughs manufactured with Galvanized Steel GA20.
- **Reinforced trough supports** every 4' (1.22mt) on every tier.
- All cage floors are manufactured with 2.11mm wire. A diameter **3% larger**.
- All power units are direct drive "coupled motors and gearboxes", without belts or need for maintenance.
- With a **J-lock nipple design** and round tubes of  $\frac{3}{4}$ " in diameter.
- Filter, medicator and water meter assembled per row.
- **Flex500 Independent Feed Filling System** of 5" in diameter. (Exclusive to Alaso)
- **Manure deflectors** to a bottom pit, made of **polypropylene** with no maintenance required.
- Available with **Flat Chain Feeding System** or **Traveling Hopper Feeding System**.
- The Traveling Hopper Feeding System offers **lower power consumption** and **requires less maintenance**.




# 624CD

*A-frame Pullet Cage*

*Systems*

*3 decks*

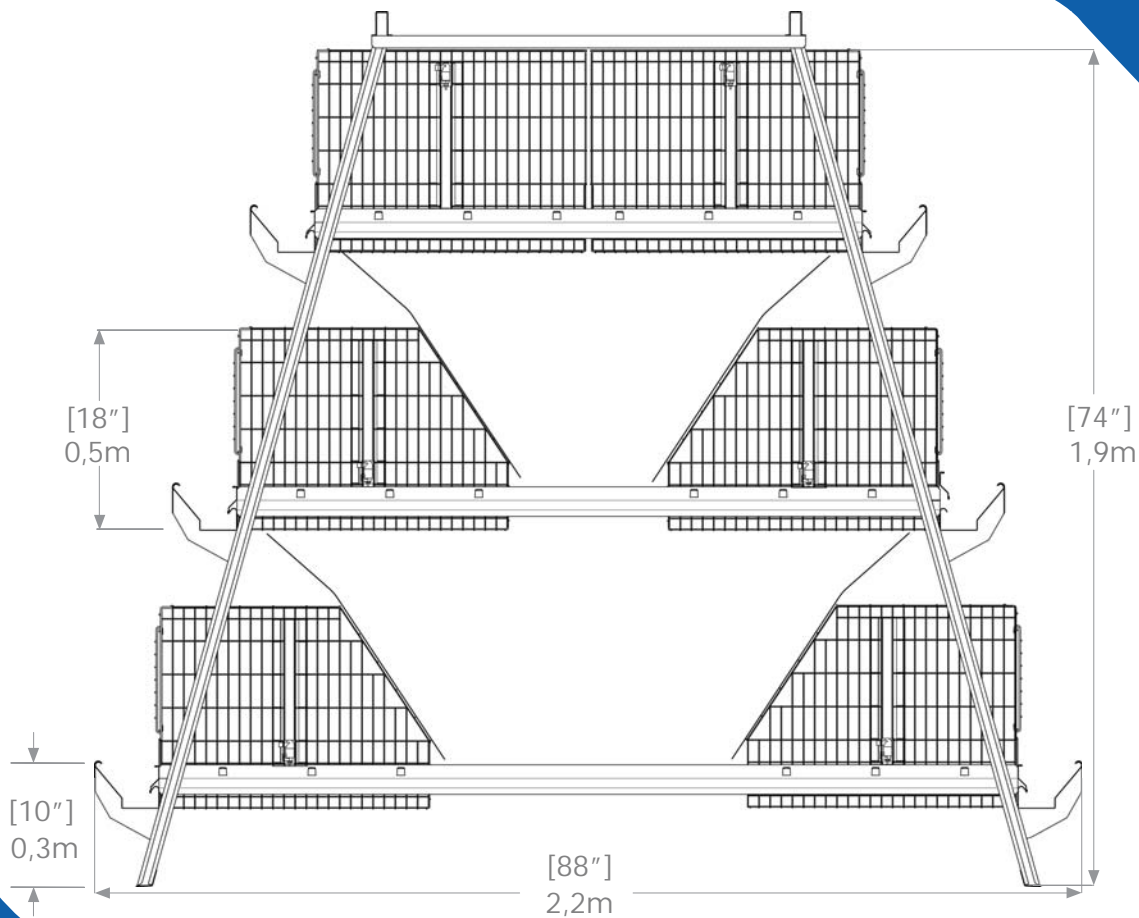

*Now with **greater height**, accommodating to the growing size of the pullets, and providing **ease of access to water** during the entire pullet period.*

